ZKAccess
Advanced Solutions, Total Security

MultiBio 700

Fingerprint & Face Access Control Terminal

Biometric Performance
Reliable, durable and highly accurate ZK fingerprint sensor with ver. 10 algorithm provides less than 1.5 second user recognition.

Communication
RS485 mode of communication is used by the sensor to communicate with the master reader or the inBio panel.

Easy Operation and Management
Works without computer. Complete setup and programming can be done via keypads and embedded firmware. Large Monochrome LCD display for rich user experience. Audio-Visual Indication for acceptance and rejection of valid/invalid fingerprints.

Capacity
Can store up to 2000 fingerprints, 400 faces and 10000 card templates and 100,000 transactions. The data can be backed up to a USB flash drive and can also be transferred to another reader in the absence of computer connectivity.

Full Access Control Built In
Relay Outputs for electric lock and alarm. Inputs for door status sensor and exit switch. Supports multiple timezones and personnel groups for programming valid entry zones. The Alarm will be triggered when the tamper switch is activated.

Options
Internal Proximity Card or Mifare Card reader allows triple factor authentication for access control.

Copyright ©2012 ZKTechnology LLC. All rights reserved.

Part Numbers

MultiBio-700 Standalone Face & Fingerprint reader

MultiBio-700-ID Standalone Face & Fingerprint reader with ID card reader

MultiBio-700-M Standalone Face & Fingerprint reader with Mifare card reader

Specifications

Capacity
- Fingerprint: 2,000 templates (expandable to 5,000)
- Face: 400 templates (expandable to 3,000)
- Card: 10,000 templates (optional)

Display
- 3" TFT color LCD screen

Communication
- RS232
- RS485
- TCP/IP
- USB Host

Power
- Power Supply: 12V DC, 3A

Environment
- Operating Temp: 32-113 ℉ (0-45 ℃)
- Operating Humidity: 20% to 80%

Dimensions
- Length: 8.6" (275 mm)
- Width: 3.1" (100 mm)
- Depth: 6.1" (195 mm)

Packaging
- Dimensions: 9" x 10 1/2" x 3 1/2"
- Weight: 3 lbs (48 ozs.)

Configuration

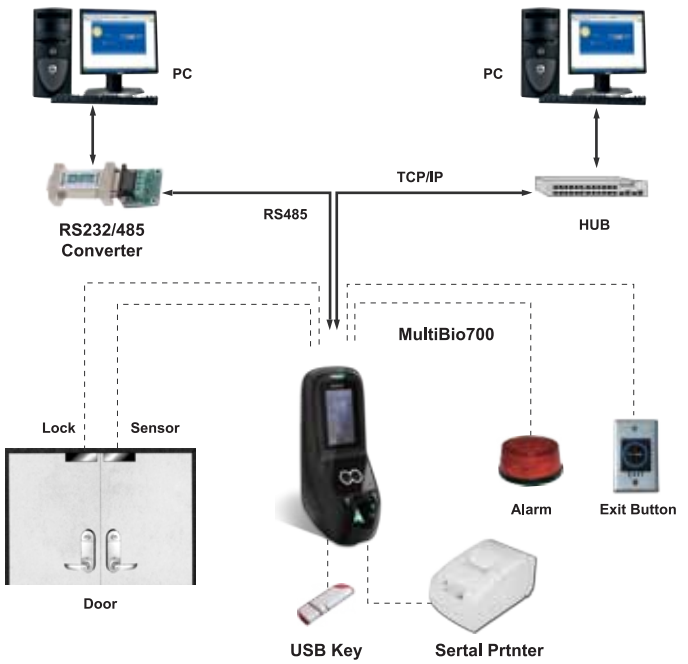

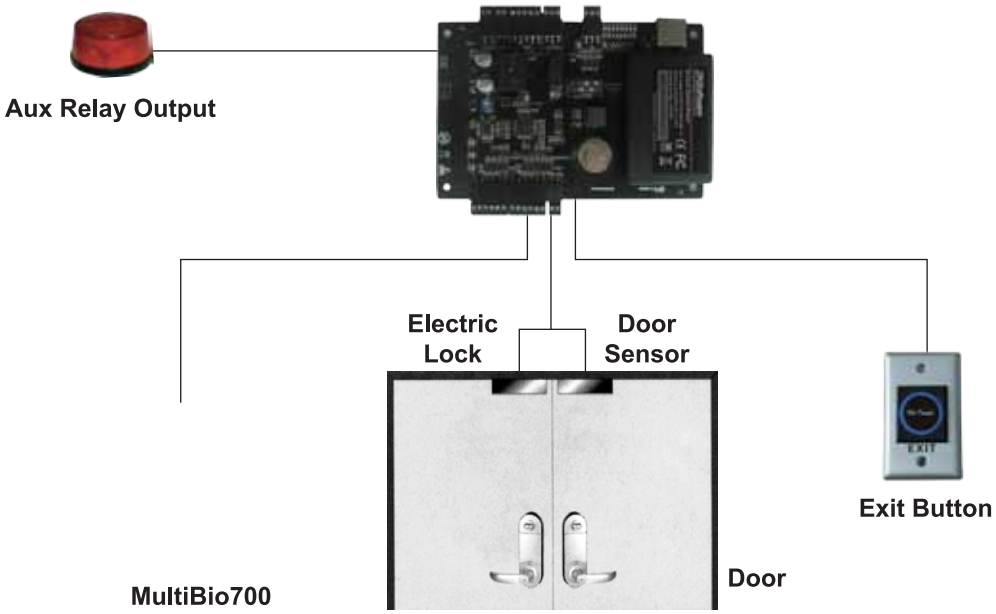

ZK Access
201 Circle Drive North, Suite 116, Piscataway, NJ 08854, United States
Tel: 732-412-6007 Fax: 732-412-6008
sales@zkaccess.com www.zkaccess.com

All designs and specifications are subject to change without notice