


APARTMENT STATIONS

20 gauge stainless steel construction. Available with metal or plastic buttons, and mounting hardware. Standard sized station wired for 3 Common (3 common wires + 1 ring wire 4 wire total). 3/8 bend standard, Mounting for 17 series is a 2 Gang mount. Mounting For 16 series is 2 mounts 6.875 on center (Couch T13). Universal bracket available for other mounting configurations.

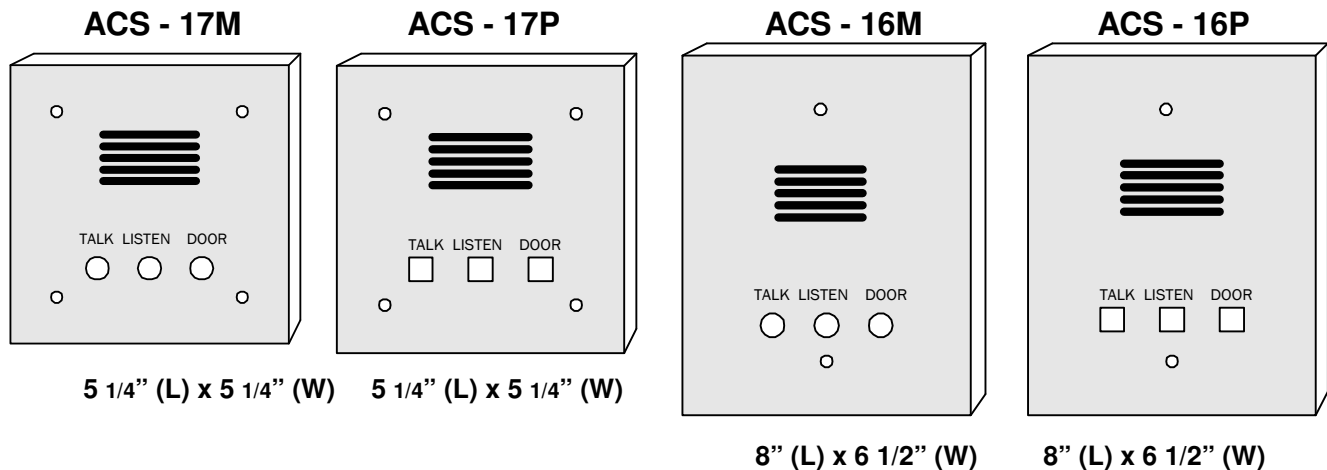

Use the following crossover chart to identify replacement stations for your current intercom apartment stations:

Current Apartment Station	HDI Replacement Station	Apartment Station Wiring
Couch T-350	ACS – 17P or M	4 common
Couch T-13**	ACS – 16P or M	2 or 3 common
American Devices AD700	ACS – 16P or M	4 common
Auth 308	ACS – 16P or M	4 common
Auth 2311	ACS – 16P or M	4 common
Auth 2620-3	ACS – 17P or M	2 common
Auth 2620-4	ACS – 17P or M	3 common
Florence	ACS – 17P or M	4 common
Greystone	ACS – 17P or M	3 common
Jeron	ACS – 17P or M	3 common
Mirtone – 401	ACS – 16P or M (horizontal)	3 common
TekTone – 101	ACS – 17P or M	3 common
TekTone – 104	ACS – 17P or M	4 common
Nutone**	ACS – 16P or M (with bracket)	3 common

**** Notes:**

Couch T-13 and Nutone apartment stations may not be individually replaced. All stations must be replaced at the same time, along with the lobby panel and system amplifier.